

SPEKON COMPRESSION DRIVER

Ti-34


PROGRAM
POWER
60W

Ti-44

PROGRAM
POWER
80W

Ti-51

PROGRAM
POWER
120W

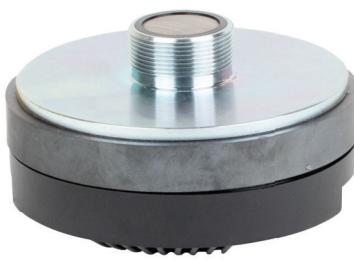

Hassasiyet	106 dB	106 dB	109 dB
Empedans	8-0hm	8-0hm	8-0hm
Frekans Aralığı	1.2-20kHz	1.2-20kHz	1-20kHz
Program Gücü	60W (Pembe test sinyali-12 dB / OCT)	80W (Pembe test sinyali-12 dB / OCT)	120W (Pembe test sinyali-12 dB / OCT)
Ses Bobin Çapı	1.35in (34.4mm)	1.75in (44.4mm)	2.03in (51.6mm)
Boğaz Çapı	1in (25,4mm)	1in (25,4mm)	1in (25,4mm)
Diyafram Malzemesi	Titanyum	Titanyum	Titanyum
Ses Bobini Malzemesi	Yuvarlak alüminyum tel	Yuvarlak alüminyum tel	Yuvarlak alüminyum tel
Dış Çapı	Ø90mm	Ø115mm	Ø134mm
Net Ağırlık	0.95kg	1.5kg	2.7kg
Y-Grade	35Y (Yüksek yoğunluk)	35Y (Yüksek yoğunluk)	35Y (Yüksek yoğunluk)

HM33

34MM TİTANYUM MEMBRAN, Tİ-34 İÇİN

HM34

44MM TİTANYUM MEMBRAN, Tİ-44 İÇİN

HM35

51MM TİTANYUM MEMBRAN, Tİ-51 İÇİN

